


SPECIFICATION SUBMITTAL

Series 84P4

PENDANT MOUNTED QUAD LAMP CLOSED PRISMATIC ACRYLIC FORM WITH DIE FORMED HANG STRAIGHT MOUNTING CANOPY AND TUBULAR ARMS.

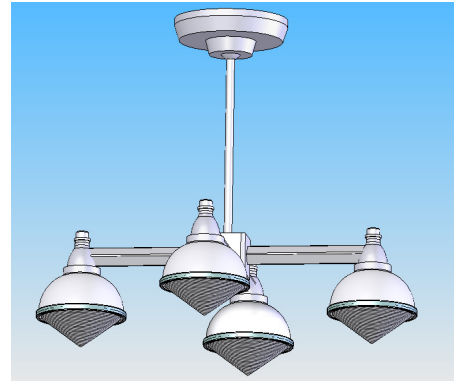

MATERIAL

Husk , 20 gauge die formed steel.
Extension Arm, .750 O.D. drawn CRS.
.750 diameter steel support stem.
Hub, 11 gauge die formed steel.

REFLECTOR

Clear prismatic molded micro cellular acrylic upper and lower segments, secured with clamp ring.

MOUNTING

Ceiling mounted using .750 diameter steel support stem and surface canopy with hang straight swivel.

ELECTRICAL



Electronic ballast per specification to match lamping selected. 4 KVA socket rated porcelain medium base with reinforced screw shell. Ballast mounted in canopy. Code gauge internal wiring.

FINISH

All metal parts post powder coated or electro-statically applied wet finish color as per specification. Custom exterior finishes available on special order.

CERTIFICATIONS

UL listed and IBEW union made.

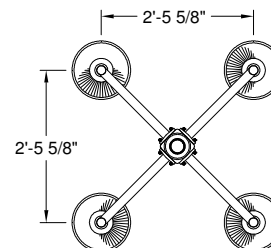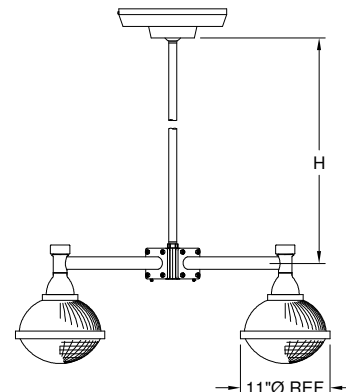

ORDERING GUIDE

84P Series	4 No of Lamps	Lamp Type	Volts	Painted Finish	Options	Height
	4	70W HID	120	AL - Aluminum WH - White CTBS - Color to be specified	GL - Cast Glass two part globe Fusing GLR - Fast blow fuse GMF - Slow blow fuse	H - Stem length